


# SAYTEX® CP-2000 FLAME RETARDANT

## DESCRIPTION

Tetrabromobisphenol A

SAYTEX CP-2000 flame retardant is a reactive intermediate, or additive, depending on the application.

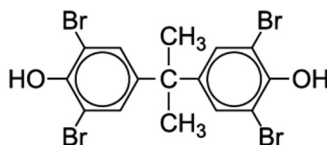

## APPLICATIONS

As a reactive flame retardant, SAYTEX CP-2000 flame retardant finds particular application in epoxy, vinyl esters and polycarbonate systems. As an additive flame retardant, SAYTEX CP-2000 flame retardant is widely used in ABS.

## BENEFITS AND FEATURES

SAYTEX CP-2000 flame retardant is a highly pure flame retardant containing very stable aromatic bromine. It can be used as a reactive or additive flame retardant.

As a reactive flame retardant, SAYTEX CP-2000 flame retardant finds particular application as a reactive monomer in epoxy and polycarbonate polymers. It is very cost-effective and once reacted, it is permanent and non-migrating.

SAYTEX CP-2000 flame retardant is a major component in epoxy oligomers used as additives for styrenic polymers and many engineering thermoplastics. Properties of note are improved polymer viscosity and UV resistance.


As an additive flame retardant, SAYTEX CP-2000 flame retardant is widely used in ABS. It melt blends into these systems, resulting in excellent processability, impact strength and moderate-range UV stability.

SAYTEX CP-2000 flame retardant is generally used with a synergist such as antimony oxide for maximum flame retardant performance.

## TYPICAL PROPERTIES\*

% Bromine (theoretical)	58.8
Melt point (°C)	181
Molecular weight	543.9
Appearance/form	white/powder
Specific gravity	2.18
Dielectric constant (1 MHz)	2.18
Dissipation factor (1 MHz)	0.17
Bulk density (Hosokawa powder tester, lb/ft <sup>3</sup> , [Kg/m <sup>3</sup> ])	
Packed	76.5 [1129]
Aerated	53 [849]
Refractive index	1.73

## TYPICAL PROPERTIES\*

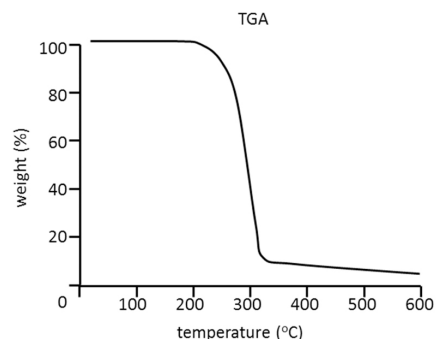

### Solubility (weight % at 25°C)

Water	< 0.01
Acetone	69.60
Methanol	47.20
Toluene	6.40
Styrene	8.50
Epoxy resin (Dow DER343)	< 0.1
TGA (TA Instrument model 2950, 10°C/min, under N <sub>2</sub> )	
1% weight loss, °C	222
5% weight loss, °C	251
10% weight loss, °C	267
50% weight loss, °C	310
90% weight loss, °C	459

\*These properties are typical but do not constitute a specification either in part or as a whole. Specification data is available on request from sales, customer service or customer technical service.

## SHIPPING INFORMATION

Transportation Classification: not regulated for transportation

Harmonized tariff number: 2908.10

Packaging and minimum order information is available from sales or customer service.

## CHEMICAL REGISTRATION NUMBERS

CAS: 79-94-7  
EINECS: 2012369  
MITI: 4-205

## RESPONSIBLE CARE

Albemarle is committed to the safety and well-being of our customers, employees and the community at large. Safety Data Sheets (SDS) are available upon request.



NORTH AMERICA 4250 Congress Street, Suite 900 • Charlotte, NC 28209 • Tel: +1 980 299 5700  
EUROPE Parc Scientifique Einstein, Rue du Bosquet 9, 1348 • Louvain-la-Neuve, Belgium • Tel: +32 10 48 17 11  
LATIN AMERICA Av. Brigadeiro Faria Lima, 1461 – sala 131-B • Sao Paulo, SP Brazil, 01451-001 • Tel: +55 11 99655-2288  
CHINA Room 3202, No. 757 Mengzi Road, Gopher Center, Huangpu District • Shanghai, PRC. 200023 • Tel: 86.21.6103.8666

The information presented herein is believed to be accurate and reliable, but is presented without guarantee or responsibility on the part of Albemarle Corporation and its subsidiaries to ensure the accuracy or reliability of the information. It is the responsibility of the user to comply with all applicable laws and regulations and to provide for a safe workplace. The user should consider all information contained herein only as a guide, and should take precautions that the user considers necessary or prudent to promote a safe work environment, such as considering all applicable health and safety hazards, developing safe work practice procedures and properly instructing employees. Further, nothing contained herein shall be taken as an inducement or recommendation to manufacture or use any of the materials or processes mentioned herein in violation of existing or pending patents.